BridgeCom SYSTEMS

BCR Flying Leads Cable - 30"

Wire Color	BCR Pin Number	BCR Pin Function
Black & Shield	25	GND
Orange	20	External PTT Input*
White (Through Series Resistor)	19	Tx Audio Input
Blue (Through Series Resistor)	8	Rx Disc Out
Brown	17	COS Out
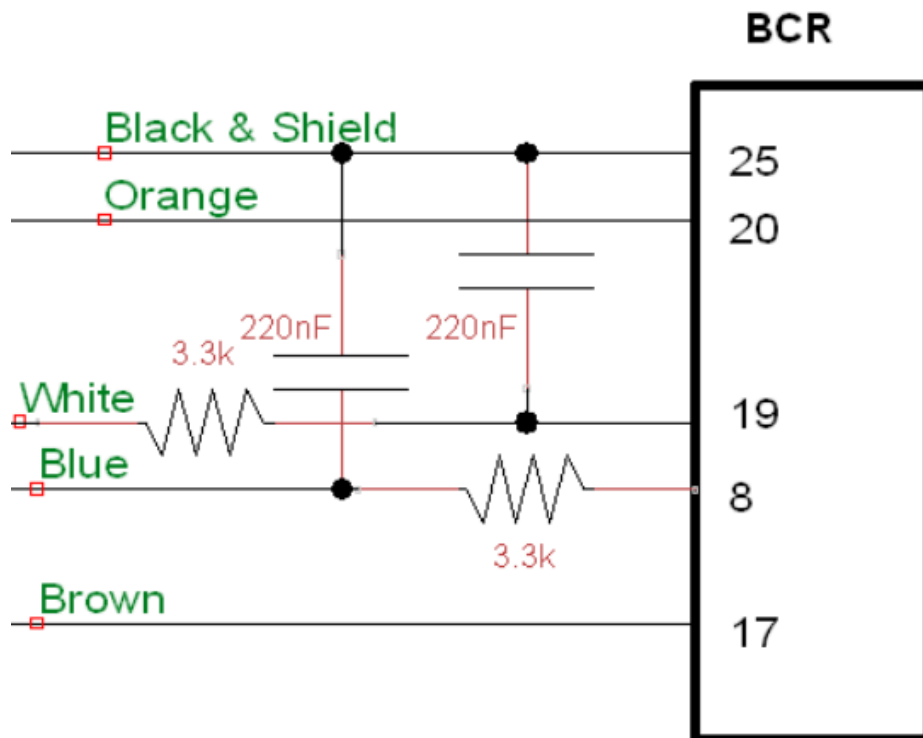
*Note - When the external PTT line is engaged, the BCR repeater will transmit with the settings configured in the User 1 slot. Refer to the BCR User manual (Page 8).