


BDR-1500/4500 to Maxon TM-8000C Cable - 30"

BDR Pin Number	BDR Pin Function	Wire Color	TM-8000C Pin Function	TM-8000C Pin Number
9	GND	Black & Shield	GND	15
13	PTT In	Brown	COS Out	10
19	Audio Out	White	Audio In	5
20	GND	-	-	-
23	Valid Signal Out	Orange	PTT In	8
25	Audio In	Blue	Audio Out	9

BDR-1500/4500 (Back View)

TM-8000C (Back View)

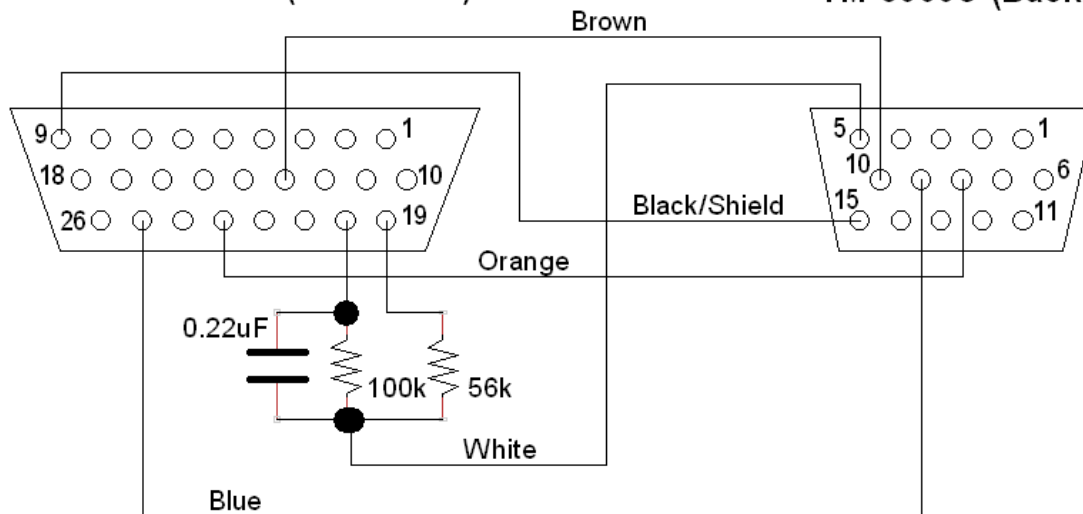

Note: Set Repeater Gain Setting to 6.0dB in BDR-1500/4500 CPS

